

**IB040106**
**INDUCTIVE SENSORS • ENLARGED SWITCHING DISTANCE**

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.


**MECHANICAL DATA**

Active area material of sensor	Plastic PET
Ambient temperature (MAX)	70 °C
Ambient temperature (MIN)	-25 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	Stainless steel 1.4404
Material of cable sheath	PUR (Polyurethane)
Max. tightening torque	0.8 Nm
Mechanical mounting condition for sensor	Flush
Number of wires	3
Pressure-proof	No
Sensor length	22 mm
Thread length	16 mm
Thread pitch	0.5 mm
Thread size, metric	4


**ELECTRICAL DATA**

Cascadable	No
Correction factor (aluminum)	0.5
Correction factor (brass)	0.6
Correction factor (copper)	0.45
Correction factor (St37)	1
Correction factor (stainl. steel)	0.8
Hysteresis	10 %
IO-Link compatible	Yes
Max. output current	100 mA
No-load current	10 mA
Norm measuring plate	4x4x1
Relative repeat accuracy	2 %
Reverse polarity protection	Yes

## ELECTRICAL DATA

Short-circuit-proof	Yes
Suitable for safety functions	No
Supply voltage (MAX)	30 V
Supply voltage (MIN)	10 V
Switching distance	1 mm
Switching frequency	3000 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	Yes
With monitoring function of downstream devices	No


## CONNECTION

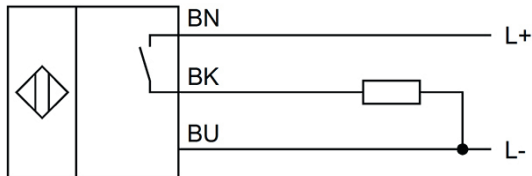

**Colors:** BN (brown), BU (blue), BK (black)

**Functions:** BN = L+, BU = L-, BK = PNP NO

## DIMENSIONAL DRAWING

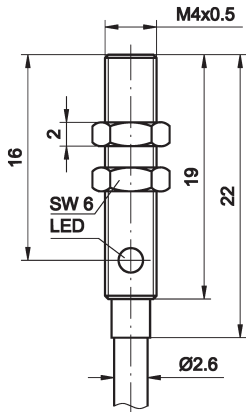

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.