

IB12A583

INDUCTIVE SENSORS • ATMOSPHERIC-CHANGE RESISTANT

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.



MECHANICAL DATA

| | |
|--|------------------------|
| Active area material of sensor | PTFE |
| Ambient temperature | -55 °C ... 60 °C |
| Ambient temperatures < -25°C | Yes |
| Cable length | 2 m |
| Degree of protection (IP) | IP69K |
| Housing design | Cylinder, screw-thread |
| Housing material | Stainless steel 1.4571 |
| Material of cable sheath | FEP |
| Mechanical mounting condition for sensor | Flush |
| Number of wires | 3 |
| Pressure-proof | No |
| Sensor length | 63 mm |
| Thread length | 35 mm |
| Thread pitch | 1 mm |
| Thread size, metric | 12 |
| Wire cross section | 0.75 mm ² |


ELECTRICAL DATA

| | |
|-------------------------------|-----------------------|
| Cascadable | No |
| IO-Link compatible | No |
| Max. output current | 200 mA |
| No-load current | 4 mA |
| Norm measuring plate | 12x12x1 |
| Reverse polarity protection | Yes |
| Short-circuit-proof | Yes |
| Suitable for safety functions | No |
| Supply voltage | 10 V ... 33 V |
| Switching distance | 2 mm |
| Switching frequency | 1000 Hz |
| Type of electrical connection | Cable |
| Type of switching function | Normally open contact |

ELECTRICAL DATA

| | |
|--|-----|
| Type of switching output | PNP |
| Voltage drop | 2 V |
| Voltage type | DC |
| With LED display | Yes |
| With monitoring function of downstream devices | No |

CONNECTION

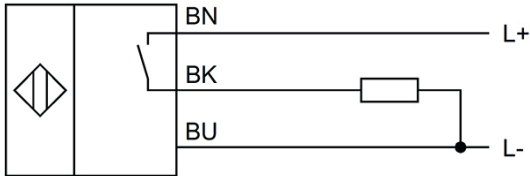

Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = PNP NO

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!