

**IB09C299****INDUCTIVE SENSORS • NORM SWITCHING DISTANCE**

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.


**MECHANICAL DATA**

Active area material of sensor	PA 6.1 GF15
Ambient temperature	-25 °C ... 70 °C
Degree of protection (IP)	IP67
Housing design	Cuboid
Housing material	Aluminium
Material of cable sheath	PVC
Max. tightening torque	0.7 Nm
Mechanical mounting condition for sensor	Flush
Pressure-proof	No
Sensor height	33 mm
Sensor length	8 mm
Sensor width	8 mm

**ELECTRICAL DATA**

Cascadable	No
IO-Link compatible	No
Max. output current	200 mA
Suitable for safety functions	No
Supply voltage	10 V ... 30 V
Switching distance	2 mm
Type of electrical connection	Cable
Type of switching function	Breaker contact
Type of switching output	PNP
Voltage type	DC
With monitoring function of downstream devices	No

## CONNECTION

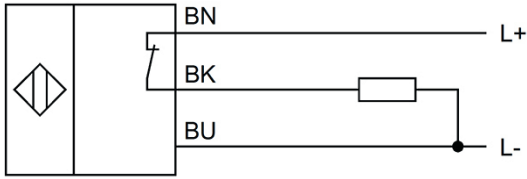

**Colors:** BN (brown), BU (blue), BK (black)

**Functions:** BN = L+, BU = L-, BK = PNP NC

## DIMENSIONAL DRAWING

### INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

### DISPOSAL



### SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!