

## IBR40060

### INDUCTIVE SENSORS • DISTANCE MEASUREMENT

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.




#### MECHANICAL DATA

Ambient temperature (MAX)	60 °C
Ambient temperature (MIN)	0 °C
Degree of protection (IP)	IP67
Housing design	Cylinder plain
Housing material	Stainless steel
Mechanical mounting condition for sensor	Flush
Sensor diameter	4 mm
Sensor length	30 mm

#### ELECTRICAL DATA

Distance measuring sensors	Yes
Measuring range length (MAX)	1 mm
Measuring range length (MIN)	0 mm
Operating voltage (MAX)	30 V
Operating voltage (MIN)	15 V
Supply voltage (MAX)	30 V
Supply voltage (MIN)	15 V
Type of analog output	0 V ... 10 V
Type of electrical connection	Cable
Voltage type	DC

## CONNECTION

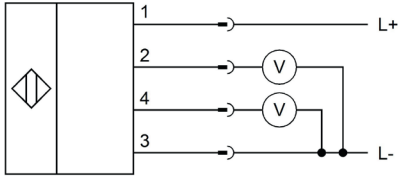

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = 0-10V, 3 = L-, 4 = 0-10V

## DIMENSIONAL DRAWING

### INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

### DISPOSAL



### SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.