


IN30C968

INDUCTIVE SENSORS • ATMOSPHERIC-CHANGE RESISTANT

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

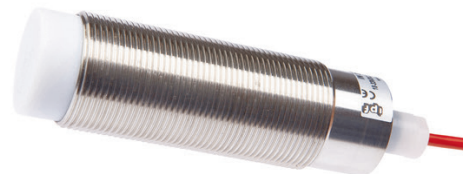

MECHANICAL DATA

Active area material of sensor	PTFE
Ambient temperature	-55 °C ... 60 °C
Ambient temperatures < -25°C	Yes
Atmospheric-change resistant (temperature cycle)	Yes
Cable length	2 m
Degree of protection (IP)	IP69K
Housing design	Cylinder, screw-thread
Housing material	Stainless steel 1.4571
Material of cable sheath	FEP
Mechanical mounting condition for sensor	Non-flush
Number of wires	3
Pressure-proof	No
Sensor length	100 mm
Thread length	68 mm
Thread pitch	1.5 mm
Thread size, metric	30
Wire cross section	0.34 mm ²

ELECTRICAL DATA

Cascadable	No
IO-Link compatible	No
Max. output current	200 mA
No-load current	4 mA
Norm measuring plate	30x30x1
Reverse polarity protection	Yes
Short-circuit-proof	Yes
Suitable for safety functions	No
Supply voltage	10 V ... 30 V
Switching distance	15 mm
Switching frequency	1000 Hz
Type of electrical connection	Cable


ELECTRICAL DATA

Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With monitoring function of downstream devices	No

OTHER DATA

Hygienic and wet area	Yes
-----------------------	-----

CONNECTION

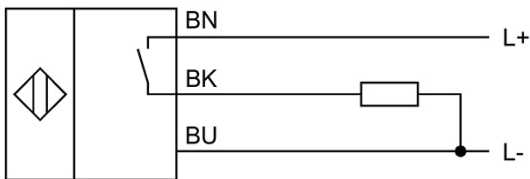

Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = PNP NO

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!