

IBR4010H

INDUCTIVE SENSORS • ENLARGED SWITCHING DISTANCE

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.



MECHANICAL DATA

Active area material of sensor	PPE
Ambient temperature (MAX)	70 °C
Ambient temperature (MIN)	-25 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cylinder plain
Housing material	Nickel silver
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Quasi-flat
Number of wires	3
Pressure-proof	No
Sensor diameter	4 mm
Sensor length	25 mm


ELECTRICAL DATA

Cascadable	No
Correction factor (aluminum)	0.2
Correction factor (brass)	0.36
Correction factor (copper)	0.25
Correction factor (St37)	1
Correction factor (stainl. steel)	0.6
Hysteresis	8 %
Max. output current	200 mA
No-load current	10 mA
Norm measuring plate	7.5x7.5x1
Readiness delay	30 ms
Relative repeat accuracy	1.2 %
Residual ripple	20 %
Reverse polarity protection	Yes
Short-circuit-proof	Yes
Suitable for safety functions	No

ELECTRICAL DATA

Supply voltage (MAX)	30 V
Supply voltage (MIN)	10 V
Switching distance	2.5 mm
Switching frequency	800 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	Yes
With monitoring function of downstream devices	No


CONNECTION

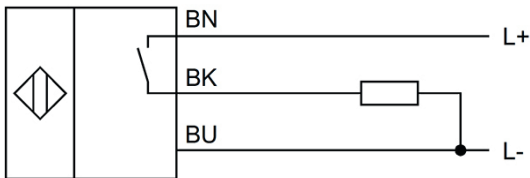

Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = PNP NO

DIMENSIONAL DRAWING

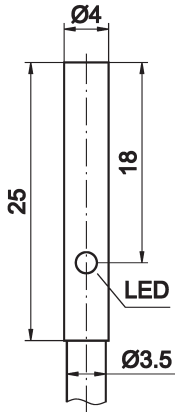

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.