


## VKA0L375

### CONNECTION TECHNOLOGY • CABLE SOCKETS /CONNECTORS ONE-SIDED PRE-ASSEMBLED

ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

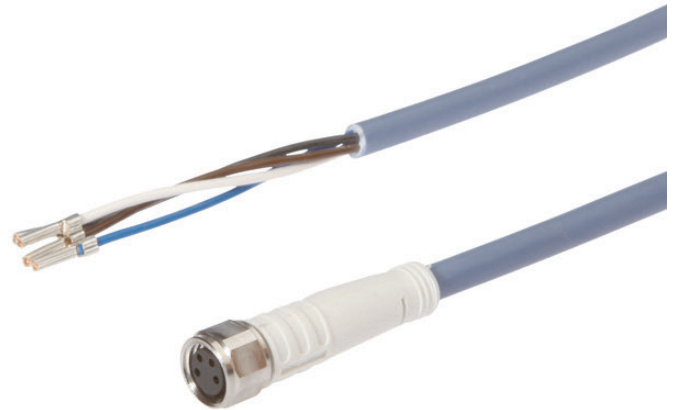

#### MECHANICAL DATA

Ambient temperature (MAX)	105 °C
Ambient temperature (MIN)	-40 °C
Cable length	10 m
Cable sheath color	Grey
Contact body material	CuZn
Contact coating material	Au
Degree of protection (IP)	IP67
Increased ambient temperature > 90°C	Yes
Material of cable sheath	Other
Number of wires	4
Perm. ambient temperature of cable, fixed cable (MAX)	105 °C
Perm. ambient temperature of cable, fixed cable (MIN)	-40 °C
Perm. ambient temperature of cable, flexible cable (MAX)	105 °C
Perm. ambient temperature of cable, flexible cable (MIN)	-25 °C
Positioning of cable feed, field side	Straight
Seawater-resistant	Yes
Suitable for trailing chain	Yes
Wire assembly	42 x 0.1mm
Wire cross section	0.34 mm <sup>2</sup>

#### ELECTRICAL DATA

Ampacity	4 A
Flow resistance	5 mOhm
Line diameter	4.6 mm
Nominal supply voltage	30 V
Number of pins	4
Rated current I <sub>n</sub>	4 A
Rated voltage	30 V
Type of cable	Multi-core
Type of electrical connection, field side	M8
Type of electrical connection, housing side	Free conductor end

**ELECTRICAL DATA**

Type of plug-in contact, field side	Female (socket)
With LED display	No

**OPTICAL DATA**

Degree of soiling	3
-------------------	---

**OTHER DATA**

Acid and alkali-resistant	Yes
Flame resistant	In accordance with EN 60332-1-2
Free of LABS	Yes
Halogen-free	Yes
Hydrolysis-proof	Yes
Hygienic and wet area	Yes
IR-networked	No
Ozone and UV-resistant	Yes
Recyclable	Yes
RoHs-compliant	Yes
Suitable for trailing chain and torsion resistant	Yes

**DIMENSIONAL DRAWING**

**INSTALLATION**



Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL**



**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.