


IB301106

INDUCTIVE SENSORS • ENLARGED SWITCHING DISTANCE

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

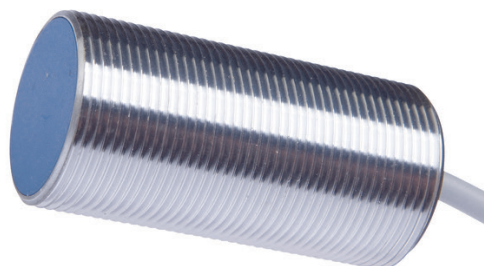

MECHANICAL DATA

Active area material of sensor	PBTP
Ambient temperature	-25 °C ... 70 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing coating	Chromium-plated
Housing design	Cylinder, screw-thread
Housing material	Brass
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Quasi-flat
Number of wires	3
Pressure-proof	No
Sensor length	60 mm
Thread length	60 mm
Thread pitch	1.5 mm
Thread size, metric	30


ELECTRICAL DATA

Cascadable	No
Correction factor (aluminum)	0.4
Correction factor (brass)	0.45
Correction factor (copper)	0.35
Correction factor (St37)	1
Correction factor (stainl. steel)	0.66
Hysteresis	10 %
IO-Link compatible	No
Max. output current	100 mA
No-load current	10 mA
Norm measuring plate	66x66x1
Relative repeat accuracy	5 %
Reverse polarity protection	Yes
Short-circuit-proof	Yes

ELECTRICAL DATA


Suitable for safety functions	No
Supply voltage	10 V ... 30 V
Switching distance	22 mm
Switching frequency	200 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	NPN
Voltage drop	2 V
Voltage type	DC
With LED display	Yes
With monitoring function of downstream devices	No

CONNECTION

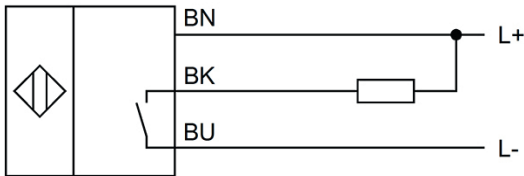

Colors: BN (brown), BU (blue), BK (black)
Functions: BN = L+, BU = L-, BK = NPN NO

DIMENSIONAL DRAWING

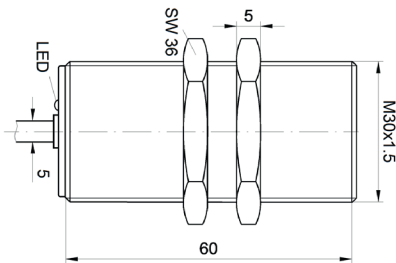

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

