


## OL100370

### FIBER OPTIC SENSORS • FIBER OPTIC AMPLIFIERS

Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.

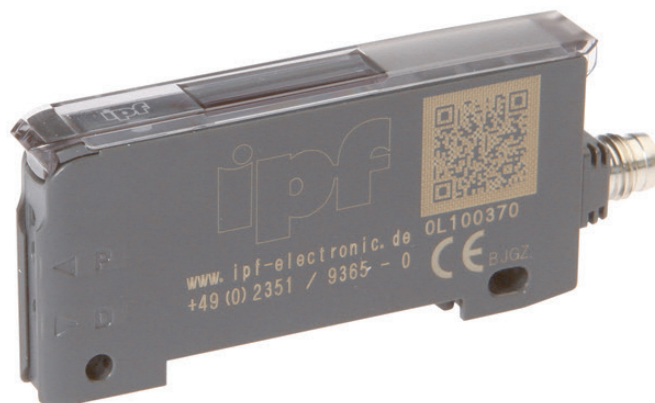

#### MECHANICAL DATA

Ambient temperature (MAX)	55 °C
Ambient temperature (MIN)	-10 °C
Amplifier height	30 mm
Amplifier length	64.5 mm
Amplifier width	9 mm
Degree of protection (IP)	IP40
Housing design	Cuboid
Housing material	PBT

#### ELECTRICAL DATA

Analogue output 4 mA ... 20 mA	No
Connection amplifier with interference suppression	Yes
Max. output current	100 mA
No-load current	30 mA
Number of pins	4
Operating voltage (MAX)	24 V
Operating voltage (MIN)	12 V
Response/decay time	0.6 ms
Reverse polarity protection	Yes
Scanning function	Light-/dark-on mode
Setting procedure	Teach-In
Setting via teach-in	Yes
Short-circuit-proof	Yes
Switching frequency	2000 Hz
Time function	Yes
Type of electrical connection	Connector M8
Type of switching output	PNP
Voltage drop	1.5 V
Voltage type	DC

**ELECTRICAL DATA**

With LED display

Yes

**OPTICAL DATA**


Light source

Polarity free red light

Wavelength of the sensor

632 nm

**DIMENSIONAL DRAWING**

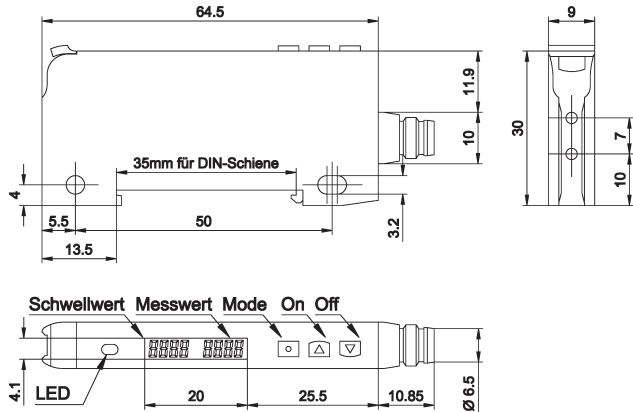

**INSTALLATION**



Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL**



**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.