

## CM030942

### COUNTERS • MULTI-FUNCTION COUNTERS



#### MECHANICAL DATA

Ambient temperature (MAX)	50 °C
Degree of protection (IP)	IP65
Height	48 mm
Housing material	Polycarbonate
Length	106.6 mm
Suitable for serial installation	No
Width	48 mm

#### ELECTRICAL DATA


2. output voltage at AC	250 V ... 250 V
2. output voltage at DC	110 V ... 110 V
Counting frequency	10 kHz
Display	LED
Max. output current 1	1 A
Max. output current 2	1 A
Number of decades	5
Number of pins	15
Number of presets to be set	2
Number of switching outputs	2
Power consumption	4 W
Pulse counter	Yes
Rated control supply voltage $U_s$ at DC	12 V ... 30 V
Switching current	1 A
Switching voltage	250 V
Timed output	99.99 s
Transducer power supply current	60 mA
Type of 2nd switching output	Relay contact
Type of electrical connection	Screw connection
Type of switching function	Change-over contact (NO/NC)
Type of switching output	Relay contact
Voltage type	DC

## ELECTRICAL DATA

With reset function

No

## DIMENSIONAL DRAWING

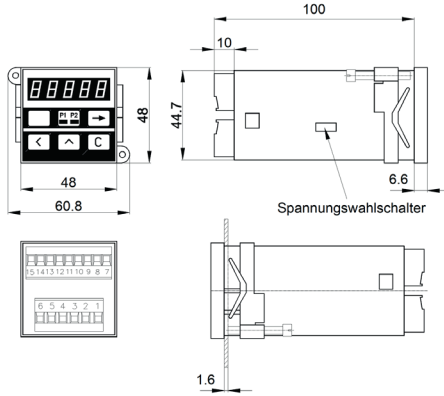

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!