

## IC120129

### INDUCTIVE SENSORS • FULL-METAL HOUSING

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.



#### MECHANICAL DATA

Active area material of sensor	V4A (1.4404)
Ambient temperature (MAX)	80 °C
Ambient temperature (MIN)	-25 °C
Degree of protection (IP)	IP69K
Housing coating	Teflon coated
Housing design	Cylinder, screw-thread
Housing material	Stainless steel 1.4404
Mechanical mounting condition for sensor	Flush
Pressure-proof	No
Sensor length	65 mm
Thread length	39.5 mm
Thread pitch	1 mm
Thread size, metric	12

#### ELECTRICAL DATA

Cascadable	No
Max. output current	250 mA
No-load current	5 mA
Norm measuring plate	12x12x1
Reverse polarity protection	Yes
Short-circuit-proof	Yes
Suitable for safety functions	No
Supply voltage (MAX)	30 V
Supply voltage (MIN)	10 V
Switching distance	2 mm
Switching frequency	180 Hz
Type of electrical connection	Connector M12
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	1.5 V
Voltage type	DC


**ELECTRICAL DATA**

With LED display	Yes
With monitoring function of downstream devices	No

**OTHER DATA**

Feeding technology	Yes
Harsh environmental conditions	Yes
Hygienic and wet area	Yes
Metallic sensor surface	Yes
Oil and cooling lubricants	Yes
Welding area	Yes
Welding-proof sensors	Yes

**CONNECTION**

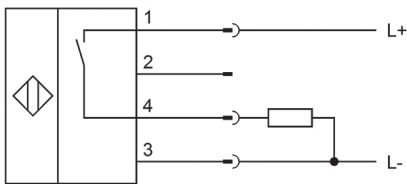

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = n. c., 3 = L-, 4 = PNP NO

**DIMENSIONAL DRAWING**

**INSTALLATION**



Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL**



**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.