

## AO000205 ACCESSORIES • MOUNTING



### MECHANICAL FEATURES

Degree of protection (IP)	IP69K
Diameter	70 mm
Housing type	Closed
Length	978.5 mm
Material	Stainless steel
Material of optical surface	PMMA
Rail mounting possible	-
Stackable housing	+
Wall mounting possible	-
Wall thickness	4 mm

### ELECTRICAL FEATURES

With integrated PCB connection technology	-
-------------------------------------------	---

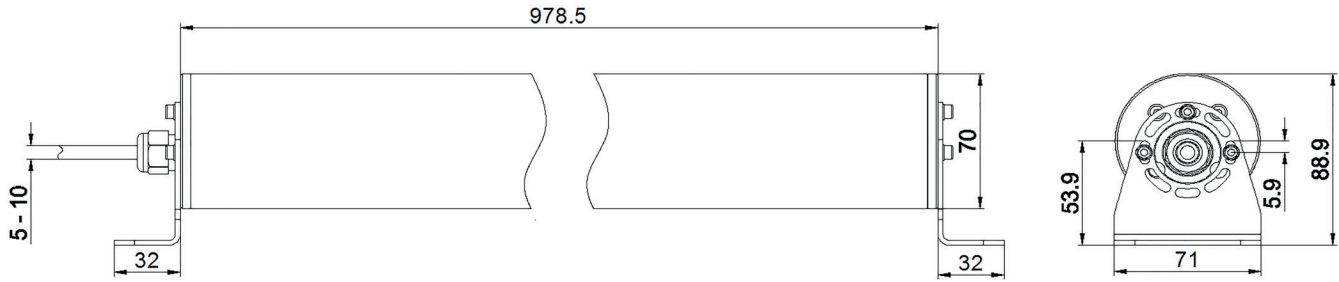
### Other

Packaging dimensions	0.0mm x 0.0mm x 0.0mm
Shipping weight	
Tariff code	85389099

### Classification

ipf product group	710
eClass 8.0	27279202
eClass 9.0	27273701
eClass 9.1	27273701
ETIM-5.0	EC002779
ETIM-6.0	EC002779
ETIM-7.0	EC002779

### Connection

**Dimensional drawing****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Software**

Please download the software or driver required for operating your new device on our homepage: [www.ipf.de](http://www.ipf.de)

**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.