


VKA01034

CONNECTION TECHNOLOGY • CABLE SOCKETS /CONNECTORS ONE-SIDED PRE-ASSEMBLED

ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

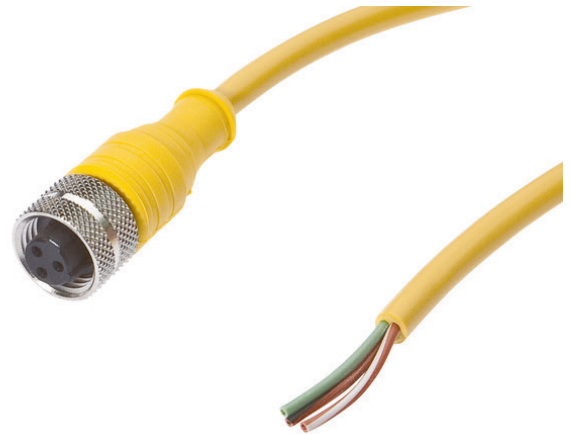

MECHANICAL DATA

Cable length	10 m
Degree of protection (IP)	IP67
Number of wires	3
Perm. ambient temperature of cable, fixed cable (MAX)	80 °C
Perm. ambient temperature of cable, fixed cable (MIN)	-25 °C
Positioning of cable feed, field side	Straight
Positioning of cable feed, housing side	Straight
Suitable for trailing chain	Yes
Wire assembly	19 x 0.16mm
Wire cross section	0.34 mm ²

ELECTRICAL DATA

Flow resistance	5 mOhm
Line diameter	5 mm
Number of pins	3
Rated current I _n	4 A
Rated voltage	250 V
Type of electrical connection, field side	MC
Type of electrical connection, housing side	Free conductor end
Type of plug-in contact, field side	Female (socket)
With LED display	No

OTHER DATA

IR-networked	No
--------------	----

DIMENSIONAL DRAWING

INSTALLATION

DISPOSAL



Mounting / Installation may only be carried out by a qualified electrician!



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.