


**UT180126**

**ULTRASONIC SENSORS • DIFFUSE REFLECTIONS SENSORS**

Ultrasonic sensors are non-contact and wear-free position switches which can also be used under rough environmental conditions. A key advantage of these devices lies in the fact that the material and the surface characteristics of the objects to be detected can be almost anything. Solids, liquids, grainy materials and powdery materials can be identified without the shape or the color of the object having any influence to the measured result. In addition, the ability to detect transparent materials such as films and fluids is of particular importance. The shape and color of the objects do not influence the result of the detection. The capability to detect transparent films or liquids is also of special importance. Ultrasonic sensors are used for distance measurement (e.g. detection of diameters, loop control), for fill level detection (e.g. silo detection), for positioning and presence detection (e.g. glass pane positioning, film tear check, glass bottle detection)

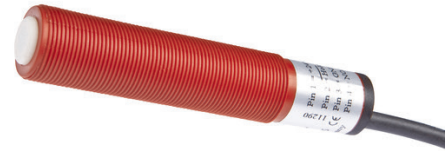

**MECHANICAL DATA**

Ambient temperature (MAX)	70 °C
Ambient temperature (MIN)	-15 °C
Degree of protection (IP)	IP67
Diameter detection	Yes
Housing design	Cylinder, screw-thread
Housing material	Plastic
Housing material, detail	Plastic
Sensor length	92 mm
Thread length	65 mm
Thread pitch	1 mm
Thread size, metric	18

**ELECTRICAL DATA**

Adjustable measuring range	Yes
Carrier frequency	330 kHz
Hysteresis	2.5 %
Max. output current	500 mA
Measuring range length (MAX)	300 mm
Measuring range length (MIN)	60 mm
No-load current	35 mA
Number of switching outputs	1
Relative repeat accuracy	0.2 %
Reverse polarity protection	Yes
Sensing range (MAX)	300 mm
Sensing range (MIN)	60 mm
Setting procedure	Manual adjustment
Short-circuit-proof	Yes
Sound cone (angle of beam spread)	8 °

## ELECTRICAL DATA

Sound cone with small angle of beam spread	Yes
Sound outlet	Axial
Supply voltage (MAX)	30 V
Supply voltage (MIN)	19 V
Switching frequency	20 Hz
Synchronization input	Yes
Synchronization possible	Yes
Type of electrical connection	Connector M12
Type of switching function	Normally open contact (NO)
Type of switching output	PNP
Voltage type	DC
With LED display	Yes


## OPTICAL DATA

High resolution	Yes
-----------------	-----

## OTHER DATA

Dead zone	60 mm
Level detection	Yes
Object detection on conveyor systems	Yes


## CONNECTION

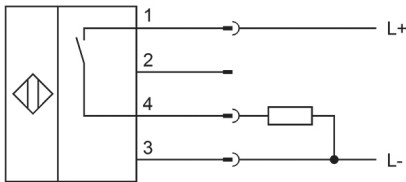

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = n. c., 3 = L-, 4 = PNP NO

## DIMENSIONAL DRAWING

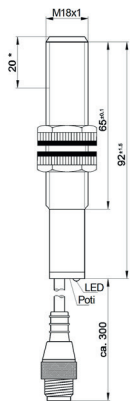

## INSTALLATION

## DISPOSAL



Mounting / Installation may only be carried out by a qualified electrician!



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.