

# SERIE E58 CM ANA

## SOLID SHAFT ABSOLUTE MULTITURN ENCODER

- Analog output
- Resolution up to 16 bits
- Measuring range configurable up to 65.536 turns
- External diameter 58 mm
- Solid shaft 6, 8, 10 or 12 mm
- Protection class IP65 according to DIN EN 60529
- Limit Switch Function
- Connection by cable (other cable length available) or industrial connector M12



Magnetic Encoder



Absolute Encoder



Analog output



Vibration and shock resistant




Limit Switch




IP65



Express Delivery

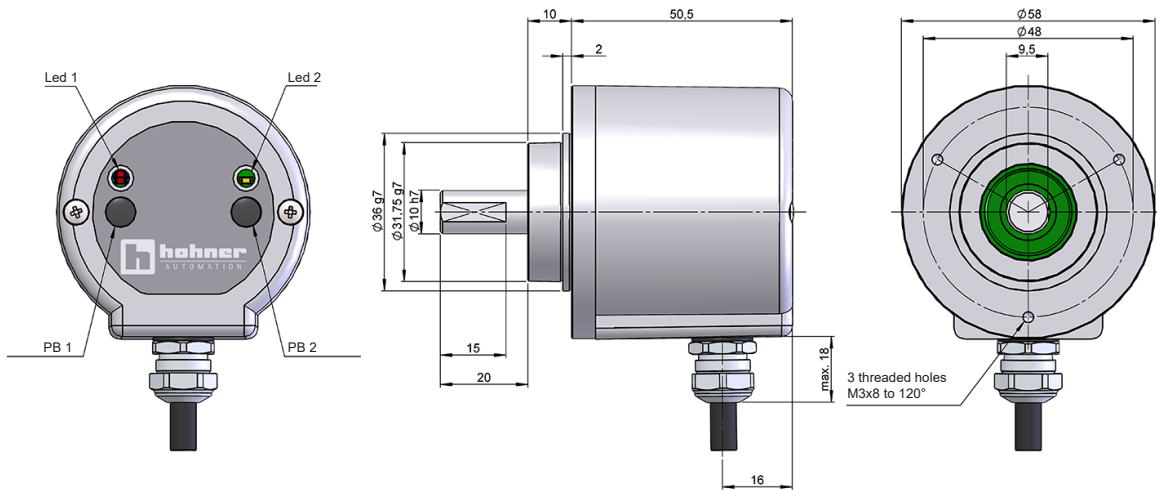

Drawing shaft type 3, mechanical option type 1, connection type 1, measuring range type CB0 or CBL

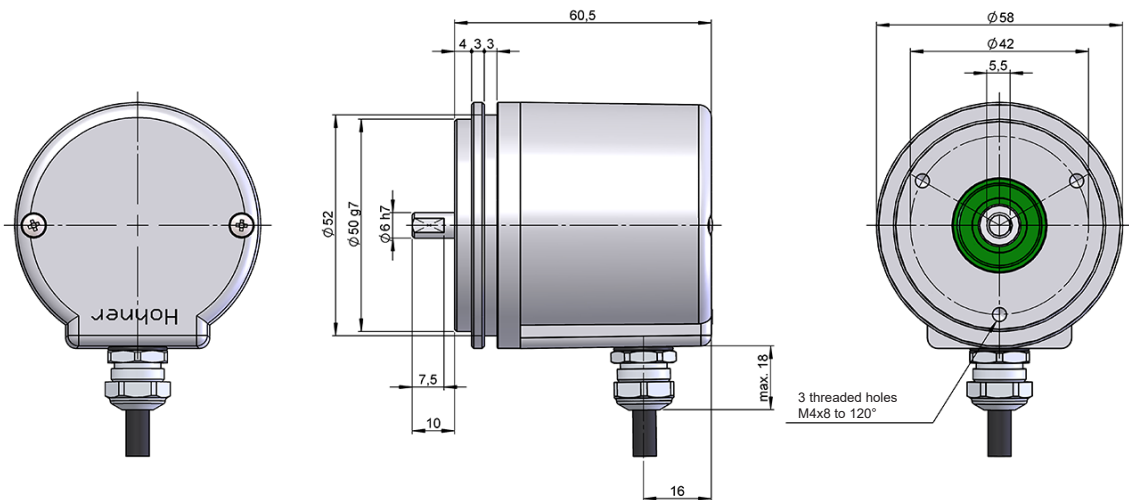

Drawing shaft type 1, mechanical option type 2, connection type 1, measuring range type CC0, CCL or NC



# SERIE E58 CM ANA

## SOLID SHAFT ABSOLUTE MULTITURN ENCODER

### REFERENCE

Reference example: E58CM-ANA-3115-16CBL / E58CM-ANA-1227-12NC4096

Serie	Interface	Solid shaft	Mechanical option	Connection	Interface / Supply Voltage	Resolution	Measuring range	Special customer
E58CM -	ANA -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> -	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
	ANA. Analog	1. Ø 6 mm 2. Ø 8 mm 3. Ø 10 mm 4. Ø 12 mm	1. Clamping 2. Synchro	1. Radial cable 2. Radial M12 5p	5. 0...20 mA, 7-30V (*) 6. 4...20 mA, 7-30V 7. 0..10V, 12-30V 8. 0..5V, 7-30V	12. 12 bits 16. 16 bits	CBO. By buttons CBL. By buttons + limit switch CCO. By cable CCL. By cable + limit switch  CONFIGURABLE (1..65536)  NC. Not configurable (**)	A01Z. +105°C (***)

Order your reference Step file 3D

info@encoderhohner.com

service available in 24 h

(\*) Only available for measuring range options CBO, CCO and NC.

(\*\*) Measuring range not configurable, indicate number of turns NC + 2° up to 65536 (1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192, 16384, 32768, 65536).  
Preset and change of direction can be configured by cable.

(\*\*\*) Only available for measuring range options CCO, CCL and NC.

**Factory configuration:** Measuring range: 65.536 turns - Direction: CW

### MECHANICAL SPECIFICATIONS

Materials	Cover: Aluminium Housing: Aluminium Shaft: Stainless Steel
Bearings	Ballraces
Bearings lifetime	1x10 <sup>10</sup> rev.
Shaft diameter	6, 8, 10 and 12 mm
Maximum number of revolutions permitted mechanically	6000 rpm
Protection against dust and splashes according to DIN EN 60529	IP 65
Rotor inertia moment	10 gcm <sup>2</sup>
Starting torque at 20°C (68°F)	≤ 0,02 Nm
Maximum load permitted on axial shaft	30 N
Maximum load permitted on radial shaft	40 N
Weight approx.	0,5 Kg
Operating temperature range	-40°C to +85°C - Standard -40°C to +105°C - Special customer A01Z
Vibration according to DIN EN 60068-2-6	100 m/s <sup>2</sup> (10Hz...2000Hz)
Shock according to DIN EN 60068-2-27	1000 m/s <sup>2</sup> (6ms)
Radial connection	2 meters cable or industrial connector M12 (other cable lengths available on order) Female connector not included

# SERIE E58 CM ANA

## SOLID SHAFT ABSOLUTE MULTITURN ENCODER

### ELECTRICAL SPECIFICATIONS

Interface	Analog
Electronic output	0..20mA , 4..20mA, 0..5V, 0..10V
Power supply (VCC)	7-30V, 12-30V
Consumption	≤ 100 mA
Resolution	12 or 16 bits
Range	up to 65.536 turns
Configurable parameters	Range, Direction and Preset
Rollover mode	Yes
Frequency	100 kHz
Short circuit protection	Yes
Protection polarity inversion	Yes

### CONNECTION



	Cable 5x0,14 95.0008051	Connector M12 5p CCW
GND	Yellow	1
VCC	White	2
SET1 / DIR	Brown	3
SET2 / PRESET	Green	4
I <sub>out</sub> / V <sub>out</sub>	Grey	5

### MEASURING RANGE CONFIGURATION

#### CONFIGURABLE BY BUTTONS (OPTIONS CBO AND CBL)

1. Press PB1 and PB2 together for 15 sec. to enter programming mode.
2. Turn the shaft to the start measuring position.
3. Press PB1 or PB2 for 2 seconds, then the green led lights solidly.
4. Turn the shaft to the end measuring position.
5. Press the other PB not configured for 2 seconds, then the green led lights solidly.

#### CONFIGURABLE BY CABLE (OPTIONS CCO AND CCL)

1. Turn the shaft to the start measuring position.
2. Connect SET1 or SET2 with +V for at least one second.
3. Turn the shaft to the end measuring position.
4. Connect the other SET not configured with +V for at least one second.

If the process is not set up correctly, the encoder gives an electronic output of 12 mA in Interface / Supply Voltage options 5 (0..20 mA, 7-30V) and 6 (4..20 mA, 7-30V), or half of maximum voltage in options 7 (0..10 V, 12-30V) and 8 (0..5 V, 7-30V).

#### NOT CONFIGURABLE (OPTION NC)

##### Direction

1. Set direction before Zero Setting the encoder.
2. If DIR pin is connected to GND or not connected, the encoder has an increasing output signal when the shaft is turned CW.
3. If DIR pin is connected to ≥ 5V up to max supply voltage, the encoder has an increasing output signal when the shaft is turned CCW. DIR pin needs to be always connected to ≥ 5V.

##### Preset


1. Turn the shaft to the position you want to set to zero.
2. Connect PRESET pin to ≥ 5V up to max supply voltage for at least T=100 ms.
3. Disconnect the PRESET pin, now the encoder is set to zero at the actual shaft position.
4. Make sure that the shaft is not move during the set to zero procedure.

# SERIE E58 CM ANA


## SOLID SHAFT ABSOLUTE MULTITURN ENCODER

### OUTPUT SIGNALS

Configurable version mA without Limit Switch function

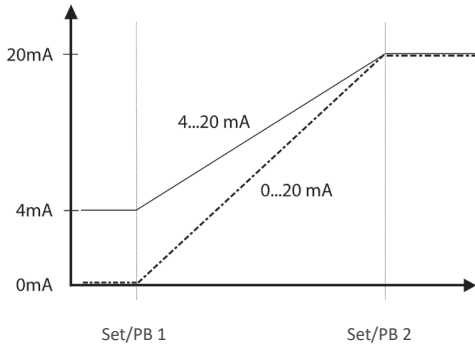


Configurable version mA with Limit Switch function

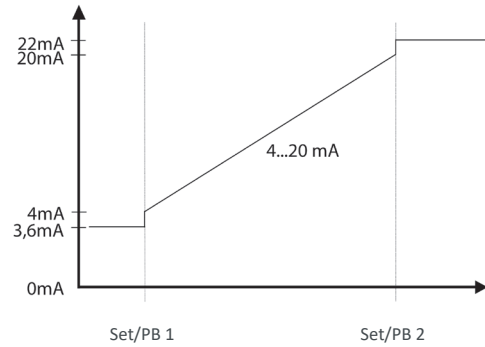


Interface	4...20mA
Low	3.6mA
High	22mA

Configurable version V without Limit Switch function

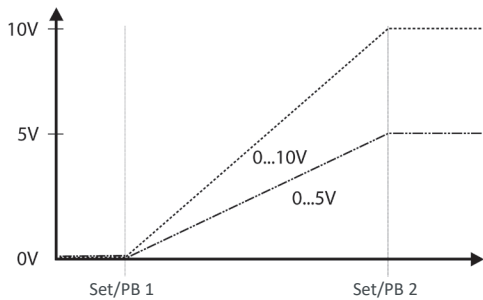


Configurable version V with Limit Switch function

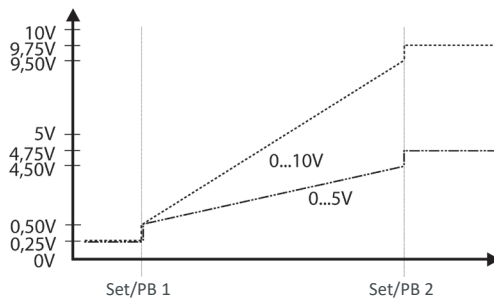


Interface	0...5V	0...10V
Low	0.25V	0.25V
High	4.75V	9.75V

Not configurable version V (Voltage)

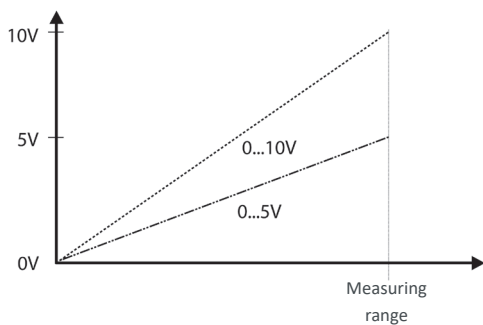

Not configurable version mA (Current)

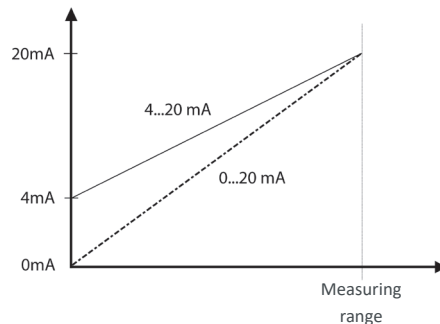

# SERIE E58 CM ANA



## SOLID SHAFT ABSOLUTE MULTITURN ENCODER

### CONNECTION DIMENSIONS

Female connector not included

#### Connection 2

Radial  
M12 5p  
male panel  
counter clockwise

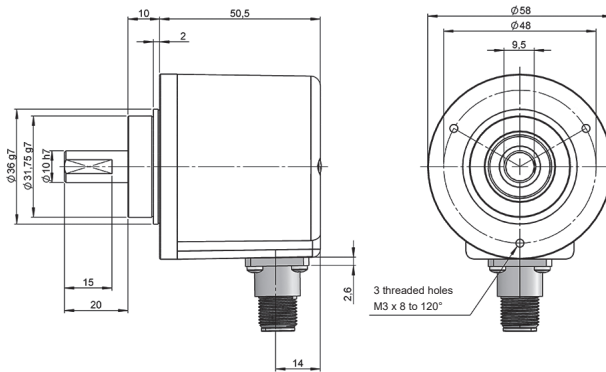

#### Female connector

95.0007265

