

**AO000375**

**LED-LIGHTS • ADDITIONAL LIGHTS FOR CAMERA SYSTEMS**

For any kind of inspection tasks with a camera sensor the lighting is essential, as only high-contrast images enable reproducible evaluations. Here the lighting has a decisive influence. The choice depends on different factors such as the distance to the test object, its size, the component criteria to be tested or the expected environmental conditions.



**MECHANICAL DATA**

Ambient temperature (MAX)	40 °C
Ambient temperature (MIN)	-10 °C
Degree of protection (IP)	IP50
Front screen material	PMMA
Height	60 mm
Housing design	Cuboid
Housing material	Aluminium
Width	60 mm


**ELECTRICAL DATA**

Lamp power	7 W
Nominal supply voltage (MAX)	30 V
Nominal supply voltage (MIN)	10 V
Type of electrical connection	M5-connector
Voltage type	DC

**OPTICAL DATA**

Actual camera illumination	Yes
Light source	White light
Light version	Surface area light

## CONNECTION

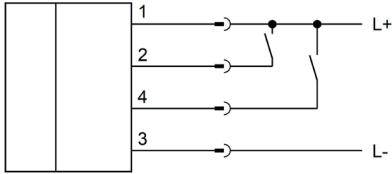

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = Input Trigger, 3 = L-, 4 = continuous operation

## DIMENSIONAL DRAWING

### INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

### DISPOSAL



### SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

LED lighting systems can generate very intense radiation, which, if used improperly, can possibly damage the eyes. For damage caused by improper use or connection, the manufacturer cannot be held responsible.

Never use these devices in applications where the safety of a person depends on their functionality.