



## EM510101

LED lights  
machine lights

- / aluminum housing
- / glass impact resistant and thermally stabilized
- / mounting with included swiveling brackets
- / compact design



**robust aluminum housing**  
**daylight white (6000K)**




### TECHNICAL DATA


### EM510101

operating voltage $U_B$	24V DC
current consumption (bei 24V DC)	1000mA
power consumption	24W
radiation angle	100°
light color	6000K
dimensions	609 x 51mm
material (housing)	aluminum
material (front screen)	tempered glass
length	597mm (L) / 80 ... 609mm (L1)
temperature (operating)	-30 ... +45°C
protection class	III
degree of protection (EN 60529)	IP67
connection	1.5m cable

### Connection



**Colors:** BN = (brown), BU = (blue)  
**Functions:** BN = L+, BL = L-

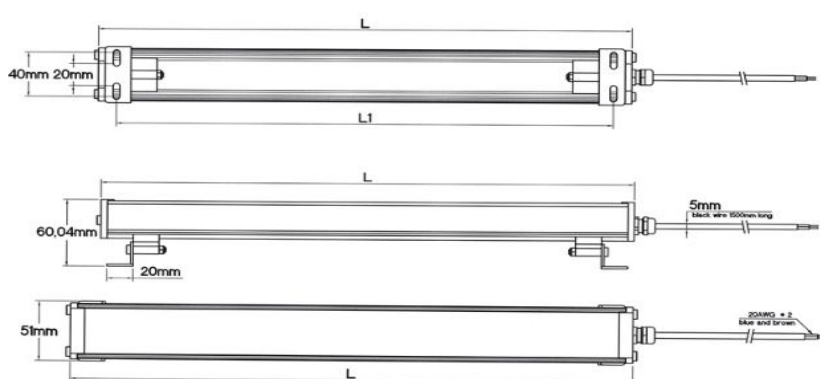

### SAFETY WARNINGS:

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.