







GDM Series Rectangular Receptacle Connectors, Type A

Technical Information

Product Description		
Order Designation	GSA-U 2000 N LO black	GSA-U 3000 N LO black
		
Description	Overmolded male appliance connector (IP65 unplugged), with 4 Phillips screws and solder lug for flexible cables	Overmolded male appliance connector (IP65 unplugged), with 4 Phillips screws and solder lug for flexible cables
RoHS-Compliant (2011/65/EU)	Yes	
(Construction Type) Standard	DIN EN 175 301-803-A	
Approvals	UR	
Technical Data		
No. of Pins	2 + PE	3 + PE
Ambient Temperature	-40 °C to +125 °C	
Housing/Grip/Screw Coupling	PA	
Contact Holder	PA	
Contact	SN	
Mechanical Data		
Degree of Protection	IP65 (when mounted with correct Hirschmann gasket)	
Terminal Type	Solder (ground contact: screw)	
Electrical Data		
Circuit	No protection circuit	
Contact Resistance	≤ 4 mΩ	
Rated Voltage	400 V AC/DC	
Rated Current	16 A	
Pollution Degree	3	
Accessories		
Scope of Delivery or Accessories (incl.)	Items supplied in one package: 200	
Accessories to be Ordered Separately	(NBR) flat gasket GSA 200-4, Order No. 730843002 (EPDM) flat gasket GSA 200-7, Order No. 730268003	

Technical Drawing

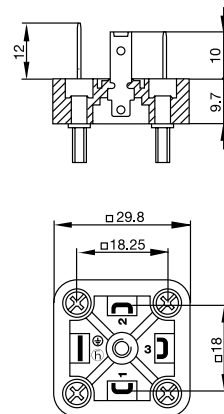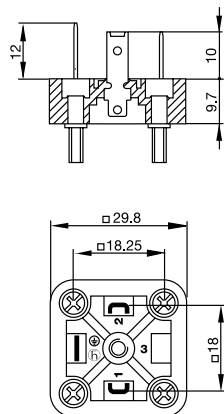

Be Certain with Belden

Order Information

Order No.	Order Designation	No. of Pins	Terminal Type
933378100	GSA-U 2000 N LO black	2 + PE	solder (ground contact: screw)
933379100	GSA-U 3000 N LO black	3 + PE	solder (ground contact: screw)