

**OS050000**

**OPTICAL SENSORS • THROUGH-BEAM SENSORS TRANSMITTERS**

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.



**MECHANICAL DATA**

Ambient temperature	0 °C ... 55 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	Stainless steel V2A
Material of cable sheath	PVC
Material of optical surface	Glass
Max. tightening torque	1.5 Nm
Number of wires	3
Sensor length	35 mm
Thread length	30 mm
Thread pitch	0.5 mm
Thread size, metric	5
Wire cross section	0.14 mm <sup>2</sup>

**ELECTRICAL DATA**

Clock frequency of the transmitter	1 kHz
Function test	Yes
IO-Link compatible	No
Measuring range	0.25 m
No-load current	10 mA
No-load current, transmitter	10 mA
Operating voltage	10 V ... 30 V
Rated switching distance	250 mm
Readiness delay	20 ms
Residual ripple	20 %
Reverse polarity protection	Yes

## ELECTRICAL DATA

Type of electrical connection	Cable
Type of input voltage	DC
Voltage type	DC
With time function	No


## OPTICAL DATA

Light beam form	Point
Light source	Infrared light
Wavelength of the sensor	880 nm

## OTHER DATA

Scope of delivery of the one-way system	Transmitter
---	-------------


## CONNECTION

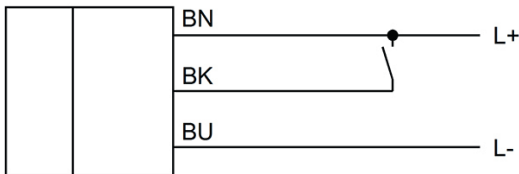

**Colors:** BN (brown), BU (blue), BK (black)

**Functions:** BN = L+, BU = L-, BK = Test

## DIMENSIONAL DRAWING

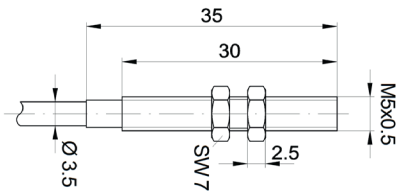

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

