


Product information

0906 UTP 104


Industrial Connecting Solutions:Cables and Adapters:T-connectors / adaptors:M8, M12, valve plug - T-connectors/adaptors:M12-M12:T-connector incl. mounting hole:0906 UTP 104

<http://dev-catalog.beldensolutions.com/link/57078-24228-256254-57229-218892-219241-219409-219492/en/conf/uistate>

| | |
|---------------------------------------|--|
| Name | 0906 UTP 104 |
| |  |
| | T-connector incl. mounting hole, M12 female with two M12 male connectors, 5 poles, especially suitable to connect decentral 24 V power supply (Power module) with (LioN-Link-) I/O modules |
| Delivery informations | |
| Availability | available |
| Product description | |
| Type | 0906 UTP 104 |
| Order No. | 98611 |
| Description | T-connector incl. mounting hole, M12 female with two M12 male connectors, 5 poles, especially suitable to connect decentral 24 V power supply (Power module) with (LioN-Link-) I/O modules |
| Number of contacts | 5 |
| Color of housing | orange |
| Product characteristics | Vibration resistance, Oil resistance |
| Classification | |
| Belden brand | Lumberg-Automation |
| Environmental conditions | |
| Environmental temperature | -25 °C ... 90 °C |
| Degree of protection (IP), mounted | IP67 |
| Pollution degree | 3 |
| Materials | |
| Housing material / Molded body | TPU, self-extinguishing |
| Contact bearer material | TPU, self-extinguishing |
| Contact material | CuZn |
| Contact material - Surface refinement | pre-nickel and 0.3 microns gold-plated |
| Knurled screw / nut material | CuZn, nickel-plated |
| Sealing material | FKM |
| Electrical data | |
| Contact resistance | ≤ 5 mΩ |
| Rated current I _n | 4 A at 40 °C |
| Nominal voltage | 60 V |
| Rated voltage | 63 V |
| Test voltage | 1.5 kV eff./60 s |
| Insulation resistance | > 1 GΩ |

Industrial Connecting Solutions:Cables and Adapters:T-connectors / adaptors:M8, M12, valve plug - T-connectors/adaptors:M12-M12:T-connector incl. mounting hole:0906 UTP 104
<http://dev-catalog.beldensolutions.com/link/57078-24228-256254-57229-218892-219241-219409-219492/en/conf/ui/istate>

Picture
Drawing

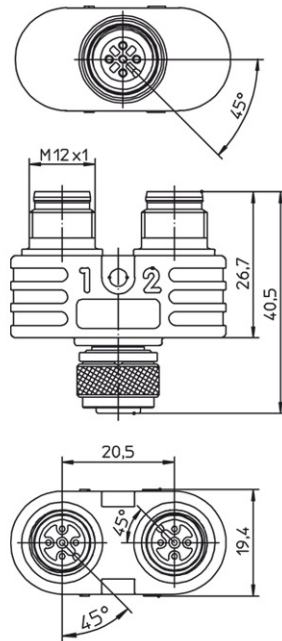

Belden Deutschland GmbH
Im Gewerbepark 2
58579 Schalksmühle
Germany
Phone: +49 7127/14-1806
E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.